




## Standard suction-cup holders with valve and fi xing screw

This type of suction-cup holder has the same characteristics as the standard type, with the addition of a valve which is activated only when a pressure is exerted on the suction cup, and closes automatically when the pressure is released.

N.B. - This type of suction-cup holders is particularly recommended for avoiding vacuum leaks, or when using a more powerful pump.

- Rapid straight and "L" shaped joint
- Plastic tube diameter 6 x 8
- Rapid "L" shaped joints = art PSV.....L

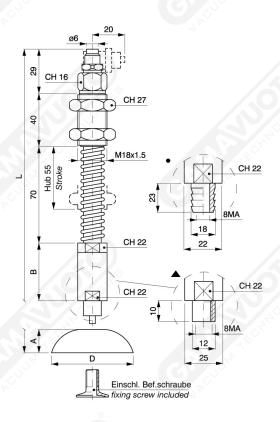

Art.

| Art.       | Α  | В    | D  | L c 25 | L c55 | L c80 | Fixing screw |
|------------|----|------|----|--------|-------|-------|--------------|
| ▲ PSV 35/L | 17 | 51   | 35 | 165    | 207   | 237   | SUM 9        |
| ▲ PSV 45/C | 17 | 51   | 45 | 165    | 207   | 237   | SUM 14       |
| ▲ PSV 45/L | 20 | 51   | 45 | 168    | 210   | 240   | SUM 14       |
| ▲ PSV 60   | 22 | 51   | 59 | 170    | 212   | 242   | SUM 21       |
| ▲ PSV 65   | 24 | 51   | 65 | 172    | 214   | 244   | SUM 21       |
| ● PSV 87   | 40 | 44.5 | 87 | 181.5  | 223.5 | 253.5 | SUM 21       |

 $\ensuremath{\mathsf{NB}}\xspace$  the suction cups are supplied on request, specifying the material