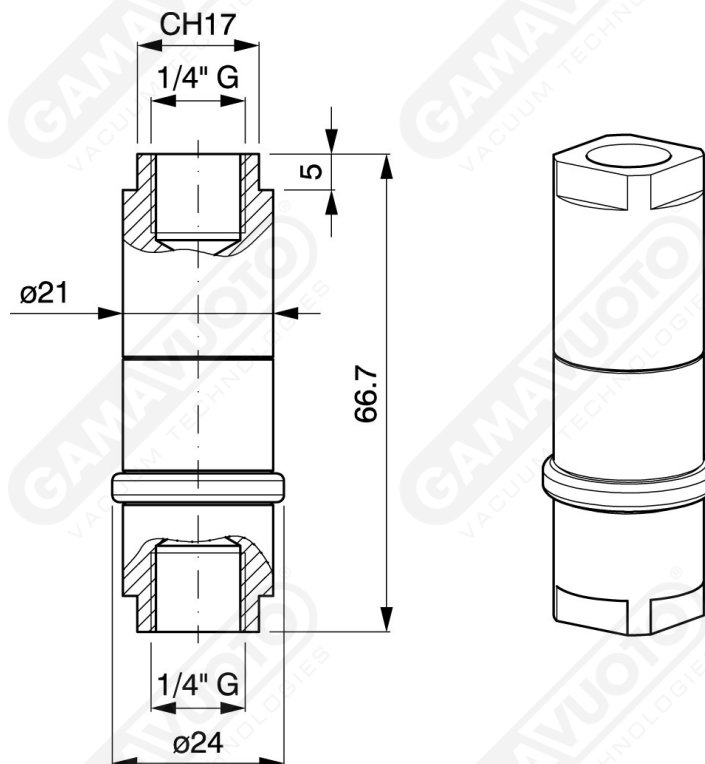


Single-stage in-line cartridge vacuum generators mod. ELM 15S ÷ 55S


Single-stage in-line vacuum generators, which use interchangeable-cartridge ejectors with capacities ranging from 15 to 55 NI / min. The vacuum generator has two opposite threaded connections one for the compressed air supply and one for aspiration thus allowing use in line and a close-positioning use.


Art. ELM 15S ÷ 55S

Model	Working pressure															Maximum vacuum level in kPa
	3 BAR			4 BAR			5 BAR			6 BAR			7 BAR			
	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	vacuum level in kPa	vacuum flow nl/min	air consumption NI/min	
ELM 15S	69	18	21	89	18	26	86	17	31	84	16	36	81	15	41	89.0
ELM 25S	40	28	28	48	29	35	60	29	41	90	30	48	89	30	54	90.0
ELM 35S	64	30	55	82	31	69	86	33	83	85	32	96	84	29	113	87.0
ELM 55S	47	50	70	57	52	87	83	54	108	89	54	125	89	53	146	89.0