




Aluminium vacuum filters with transparent tube - FAT Series

These filters made of transparent material come with an aluminium head and threaded attachments. They are particularly suitable for dusty products and environments. The transparent tub permits immediately seeing the evacuation of the filter or the changing of the cartridge. These filters come with stainless steel mesh cartridges. Degree of filtering: from 40 to 100 microns. Working temperature from 4°C to 50°C.

Mounting, maintenance and cleaning

Be very careful to respect the flow direction, as indicated by the arrow on the filter. The filters can be mounted in any position, though we advise mounting them in the vertical position, with the tub facing downwards, thus making it easy to deposit the filtered impurities. Carefully clean the tub, change the cartridge, or blow compressed air from the inside of the cartridge outwards, mount the whole unit, having checked that the seals are undamaged and in their correct positions.

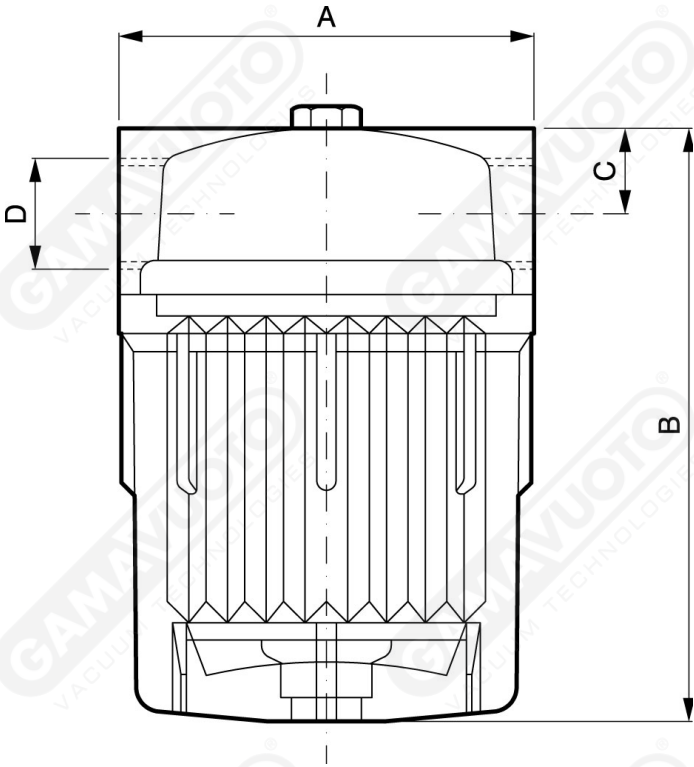

Art. FAT 10 ÷ 20

Art.	A	B	C	DØ
FAT 10-1/4	61	75	12.5	1/4" gas
FAT 10-3/8	61	75	12.5	3/8" gas
FAT 15	81	89	21	3/8" gas
FAT 20	81	140	21	1/2" gas