




Multi-stage vacuum generators mod. VMM - VML

The new “VMM - VML” series generators are made of aluminum composed of 1 to 2 practical and light modules. Each module consists of 1 or 2 rows of cartridges and can be assembled quickly and easily, with capacities ranging from 192,8 e 1207 l/min while maintaining the maximum achievable vacuum value unchanged.

In this version there are the digital vacuum switch with M8 connector and a one-way valve that allows the maintenance of the vacuum even in the event of a sudden power failure.

Available with two types of cartridges:

- High Vacuum (95%) mod. VMM
- Low Consumption mod. VML

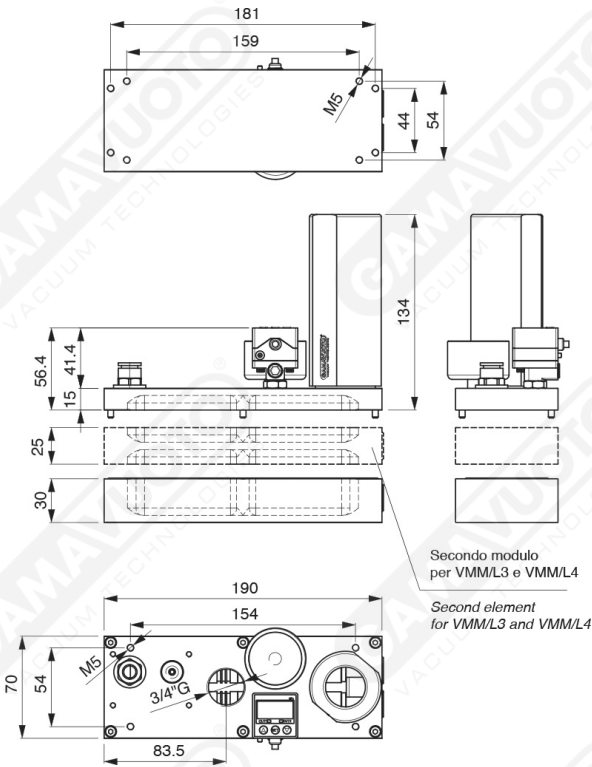

Art. VMM - VML 1 ÷ 4

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VMM1	2	41	217	70
	3	77	263	94
	4	95	311	115
	5	94	307	136
	6	93	322	158
	7	91	338	178
	8	90	357	199

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VMM2	2	41	391	141
	3	77	473	189
	4	95	559	231
	5	94	553	273
	6	93	579	316
	7	91	609	356
	8	90	642	397
	2	41	513	192
VMM3	3	77	620	257
	4	95	734	315
	5	94	725	372
	6	93	760	430
	7	91	799	485
	8	90	842	542
	2	41	513	192
	3	77	620	257

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VMM4	2	41	690	256
	3	77	835	343
	4	95	987	420
	5	94	976	496
	6	93	1022	574
	7	91	1075	646
	8	90	1133	722
Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VML1	2	28	194	48
	3	44	244	62
	4	59	284	76
	5	70	308	90
	6	75	323	105
	7	77	335	117
	8	78	345	129

Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
Mod.	Bar	Vacuum kPa	Vacuum flow NI/min	Consumption NI/min
VML2	2	28	370	102
	3	44	465	129
	4	59	541	160
	5	70	587	190
	6	75	616	219
	7	77	638	245
	8	78	658	270
	2	28	506	152
VML3	3	44	636	194
	4	59	740	240
	5	70	802	284
	6	75	842	329
	7	77	872	368
	8	78	899	405
	2	28	680	203
	3	44	854	258
VML4	4	59	994	319
	5	70	1077	379
	6	75	1131	438
	7	77	1171	491
	8	78	1207	540